

SC-CN4U-C Solar Connector




RoHS



TECHNICAL DATA

| | |
|---------------------------|------------------------|
| Insulation Material | PPE |
| Contact Material | Copper, Tin plated |
| Rated Current | 60A Max |
| Rated Voltage | 1500V (TUV) 1500V (UL) |
| Test Voltage | 12KV (TUV50HZ,1min) |
| Contact Resistance | <5mΩ |
| Degree Of Protection | IP 68 |
| Ambient Temperature Range | -40℃~ +85℃ |
| Flame Class | UL 94-V0 |
| Safety Class | II |
| Pin Dimensions | Ø4mm |

PRODUCT DIMENSIONS

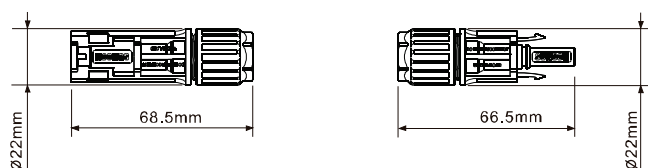

| | |
|-------------------------|---|
| Conductor cross section | 14 / 12 / 10 / 8 AWG 2.5 / 4.0 / 6.0 / 10 mm ² |
|-------------------------|---|

MAIN SPECIALITY

- >> All the connection made by double fixed connection
- >> low power loss
- >> With the capacity of anti-aging and resistance to ultraviolet radiation on the outer cover
- >> With convenient installation, strong commonality
- >> To meet the using requirement under bad outdoor condition