



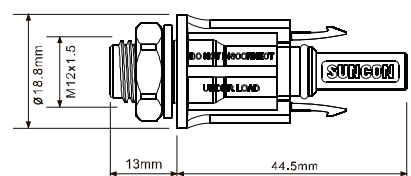

## TECHNICAL DATA

Insulation Material	PPE
Contact Material	Copper, Tin plated
Rated Current	60A Max
Rated Voltage	1500V (TUV) 1500V (UL)
Test Voltage	12KV (TUV50HZ,1min)
Contact Resistance	<5mΩ
Degree Of Protection	IP 68
Ambient Temperature Range	-40℃~ +85℃
Flame Class	UL 94-V0
Safety Class	II
Pin Dimensions	Ø4mm

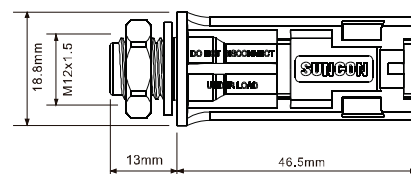

Conductor cross section	16 / 14 / 12 / 10 AWG
	1.5 / 2.5 / 4.0 / 6.0 mm <sup>2</sup>

## MAIN SPECIALITY

- >> low power loss
- >> With the capacity of anti-aging and resistance to ultraviolet radiation on the outer cover
- >> With convenient installation, strong commonality